



Mark N Ya International Group Limited
(馬可恩雅國際集團有限公司)

1004, 10/F, KWONG FAT COMM. BUILDING,
582-588 CANTON ROAD, YAU MA TEI,
HONG KONG

☎ : +852 6946 7149

✉ : info@marknya.com

🌐 : www.marknya.com



Refrigeration Equipment

2025

About us

Mark N Ya International Group Limited is a Hong Kong-registered company specializing in OEM manufacturing and global distribution of Bakery equipment, Catering equipment, Food machineries, Refrigeration and packaging machines. We are committed to delivering innovative, reliable, and cost-effective solutions for bakeries, hotels, restaurants, and food production facilities worldwide. We have been working at the design development and production of various kind of equipment under our own OEM brand, ensuring top-quality standards and compliance with international certifications such as CE and ISO. Our business model combines manufacturing expertise with global trade capabilities, enabling us to expand our presence across multiple international markets, including the Middle East, America, Africa, Asia, Europe, and beyond.

Vision & Mission

- Vision : To become a trusted global name in commercial bakery equipment through innovation, quality, and customer trust.
- Mission : To deliver high-quality OEM-manufactured bakery equipment and build long-term partnerships with clients worldwide.

Core Products

- Bakery Ovens (Deck, Rotary, Convection)
- Dough Handling Systems (Sheeters, Conical Rounders, Dividers, Spiral Mixers, Bread Slicers)
- Planetary Mixers
- Fast Food Equipment
- Proofers & Fermentation Chambers
- Packing Machines
- Baking Trays, Trolleys, and Racks
- Customized Bakery Solutions

Key Strengths

- OEM manufacturing under strict international quality standards
- Compliance with global certifications (CE, ISO)
- Dedicated family-led management structure
- Worldwide distribution network

Global Presence

With headquarters in Hong Kong and strong supplier partnerships in China, Mark N Ya International Group Limited is expanding rapidly, serving clients across the Middle East, Africa, Asia, Europe, and other regions worldwide.

Our services

- ✦ Professional Design Team;
- ✦ Be Able To Customized All kinds of Refrigeration Products;
- ✦ Repid Delivery Term;
- ✦ Customized Machine:Within 7 Days;
- ✦ Customized Machine:15-20 Days Delivery Time;



Content



❖ Cold Room

Cold Room 01

❖ Blast Freezer

Blast Freezer 04

❖ Kitchen Cabinet

Workbench Refrigeration 06

Drawer Workbench 07

Kitchen Refrigerator & Freezer 08

Salad Bar 10

Bakery Refrigerator & Freezer 11

Refrigerator 12

❖ Beverage Showcase

Beverage Showcase 14

Glass Door Display Fridge 15

Supermarket Showcase 16

Beer Showcase 17

Wine Showcase 18

❖ Food Refrigerator

Beef Steak Dry Ager Fridge 20

Sushi Showcase 20

Meat Display Refrigerator 21

Fruit Display Refrigerator 21


Deli Refrigerator 22

Ice-Cream Machine 23

Ice Maker 24



COLD ROOM

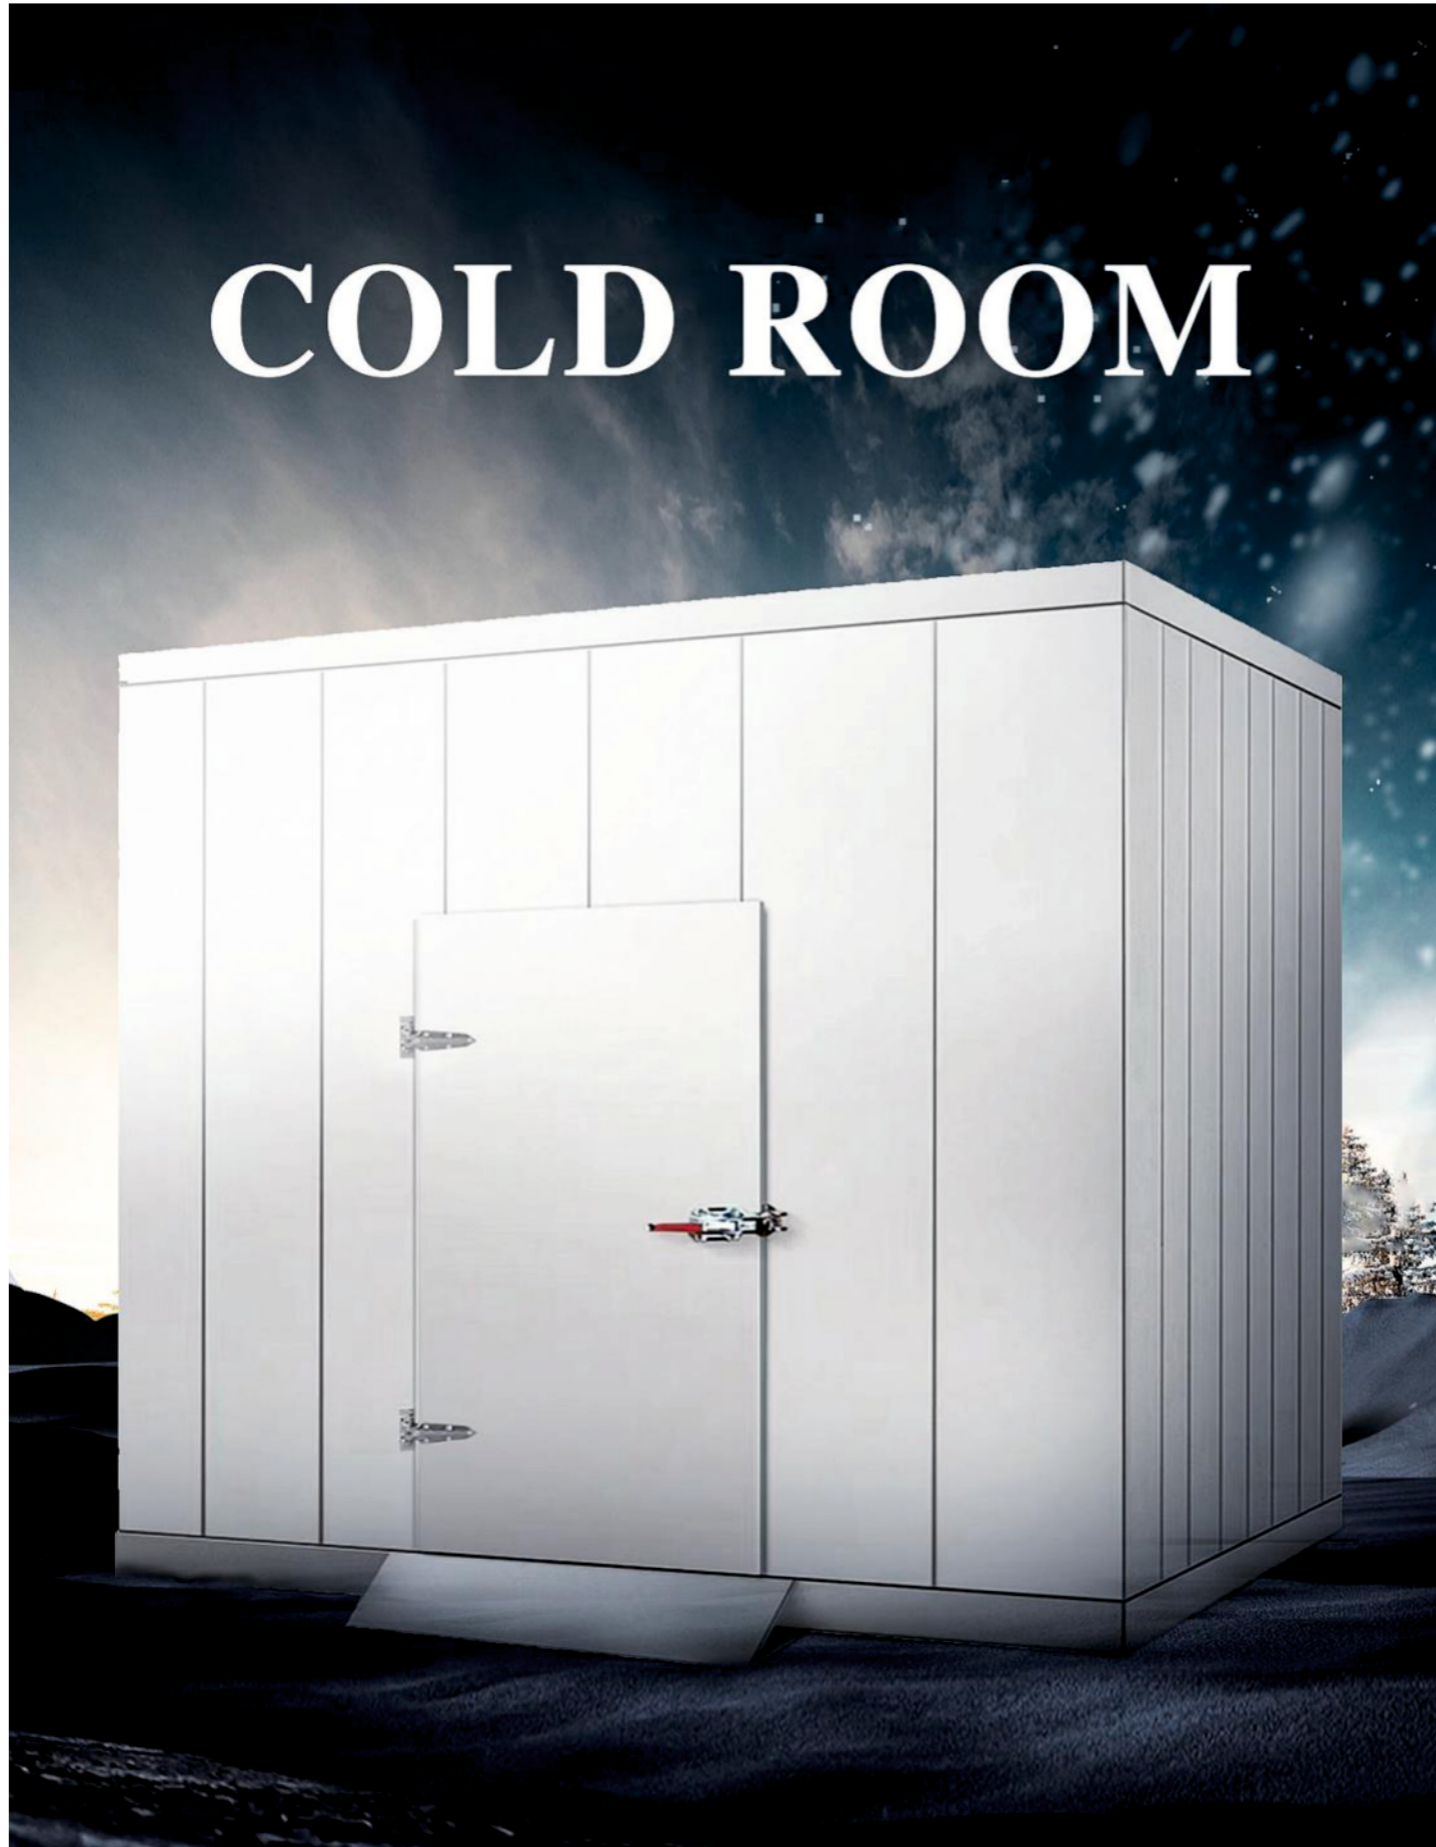

Cold Room

Product Description

- ✦ Temperature controller is famous brand: Italy Dixell, French Schneider, temperature can reach to -18-10 C;
- ✦ Using R404a, R22 refrigerant, and cooling way is fan or water cooling;
- ✦ Cold room panel is used fluoride-free material, it's more environment-friendly;
- ✦ Cold room door is made in different types, such as hinged door, swing door, sliding door, and also can according to your requirement;
- ✦ Using the automatic high-precision digital controller which is easy to operate with high efficiency;



Model	Size(mm)	Voltage	Power	Cooling Way	Gross Weight	Temperature
CR-2000C	2000*2000*2500	380V/50Hz	2.6kW	Fan Cooling	500KGS	0~10℃
CR-2000F	2000*2000*2500	380V/50Hz	2.6kW	Fan Cooling	500KGS	-18℃

BLAST FREEZER



Blast Freezer

Product Description

- ✦ The cold store temperature is displayed and controlled by the digital thermostat with which reliable cool store is provided; modular cold store is a new product with various standard sizes. Its cold store capacity may be specified or selected according to the requirements of the customer.
- ✦ The precise control and adjustment of temperature enables the customers to achieve the utmost efficiency and benefits.;



CE SDG5-40/45P
(5 Trays)

CE SDG10-40/45P
(10 Trays)

CE SDG15-40/45P
(15 Trays)

*Tray Size:400*600mm

Model	Inner Size	Machine Size	Voltage	Power	Cooling Way	Refrigerant	Description	Temperature
SDG5-40P	655*460*425	800*800*960	220V/50Hz	1.0kW	Fan Cooling	R404a	Single Door	-40 C
SDG5-45P	655*460*425	800*800*960	220V/50Hz	1.3kW	Fan Cooling	R404a	Single Door	-45 C

Model	Inner Size	Machine Size	Voltage	Power	Cooling Way	Refrigerant	Description	Temperature
SDG10-40P	655*460*825	800*870*1590	220V/50Hz	1.35kW	Fan Cooling	R404a	Single Door	-40 C
SDG10-45P	655*460*825	800*870*1570	220V/50Hz	1.75kW	Fan Cooling	R404a	Single Door	-45 C

Model	Inner Size	Machine Size	Voltage	Power	Cooling Way	Refrigerant	Description	Temperature
SDG15-40P	655*460*1225	800*870*1990	220V/50Hz	2.5kW	Fan Cooling	R404a	Single Door	-40 C
SDG15-45P	655*460*1225	800*870*1970	220V/50Hz	2.7kW	Fan Cooling	R404a	Single Door	-45 C

KITCHEN CABINET



Workbench Refrigeration




Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature
ZWT-1.2R	1200*760*800	220V/50Hz	0.51kW	240L	Static	5~-5 C
ZWT-1.5R	1500*760*800	220V/50Hz	0.51kW	340L	Static	5~-5 C
ZWT-1.8R	1800*760*800	220V/50Hz	0.71kW	440L	Static	5~-5 C
ZWT-1.2F	1200*760*800	220V/50Hz	0.51kW	240L	Static	0~-10 C
ZWT-1.5F	1500*760*800	220V/50Hz	0.51kW	340L	Static	0~-10 C
ZWT-1.8F	1800*760*800	220V/50Hz	0.71kW	440L	Static	0~-10 C



Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature
WT-1280R	1200*800*800	220V/50Hz	0.26kW	250L	Fan Cooling	2~8 C
WT-1580R	1500*800*800	220V/50Hz	0.28kW	350L	Fan Cooling	2~8 C
WT-1880R	1800*800*800	220V/50Hz	0.32kW	450L	Fan Cooling	2~8 C
WT-1280F	1200*800*800	220V/50Hz	0.26kW	250L	Fan Cooling	-12~-18 C
WT-1580F	1500*800*800	220V/50Hz	0.28kW	350L	Fan Cooling	-12~-18 C
WT-1880F	1800*800*800	220V/50Hz	0.32kW	450L	Fan Cooling	-12~-18 C

Workbench Refrigeration

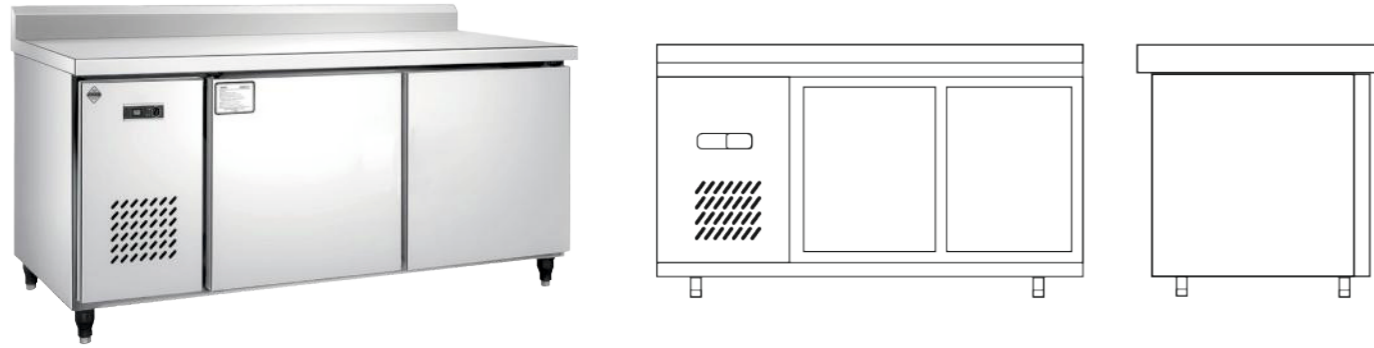

Model	Size(mm)	Packing Size	Voltage	Power	Cooling Way	N.W.	G.W.	Temperature
WT-1.2R	1200*760*800	1300*850*800	220V/50Hz	0.18kW	Fan Cooling	75kg	85kg	0~5℃
WT-1.2F	1200*760*800	1300*850*800	220V/50Hz	0.32kW	Fan Cooling	75kg	85kg	0~-18℃
WT-1.5R	1500*760*800	1600*850*800	220V/50Hz	0.21kW	Fan Cooling	85kg	95kg	0~5℃
WT-1.5F	1500*760*800	1600*850*800	220V/50Hz	0.38kW	Fan Cooling	85kg	95kg	0~-18℃
WT-1.8R	1800*760*800	1900*850*800	220V/50Hz	0.27kW	Fan Cooling	95kg	110kg	0~5℃
WT-1.8F	1800*760*800	1900*850*800	220V/50Hz	0.52kW	Fan Cooling	95kg	110kg	0~-18℃

Drawer Workbench




Model	Size(mm)	Packing Size (mm)	Voltage	Power	Cooling Way	N.W.	G.W.	Temperature
WTD-1.5R	1500*800*800	1600*850*900	220V/50Hz	0.38kW	Fan Cooling	100kg	110kg	0~10℃
WTD-1.5F	1500*800*800	1600*850*900	220V/50Hz	0.38kW	Fan Cooling	100kg	110kg	0~-18℃
WTD-1.8R	1800*800*800	1900*850*900	220V/50Hz	0.52kW	Fan Cooling	120kg	130kg	0~10℃
WTD-1.8F	1800*800*800	1900*850*900	220V/50Hz	0.52kW	Fan Cooling	120kg	130kg	0~-18℃

Kitchen Refrigerator & Freezer



KRF-L4

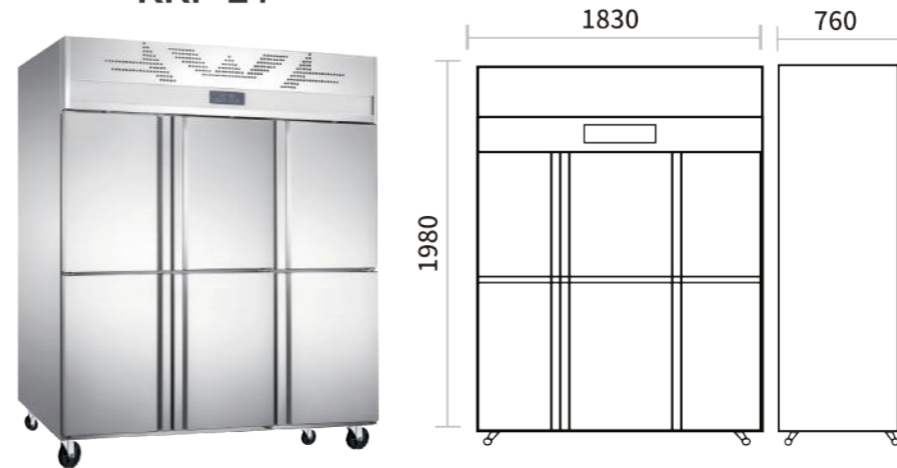

KRF-L6



Model	Size(mm)	Packing Size (mm)	Voltage	Power	Cooling Way	N.W.	G.W.	Temperature
KRF-L4	1220*760*1980	1320*850*2050	220V/50Hz	0.39kW	Fan Cooling	120kg	135kg	0~5℃ & -10~-18℃
KRF-L6	1830*760*1980	1930*850*2050	220V/50Hz	0.467kW	Fan Cooling	180kg	200kg	0~5℃ & -10~-18℃



Model:	KRF-L2
Size:	610*760*1980mm
Voltage:	220V/50Hz
Power:	0.26kW
Capacity:	500L
Cooling Way:	Fan Cooling
Temperature Range:	0~5℃ / -10~-18℃

Kitchen Refrigerator & Freezer



ER-1.2G

ER-1.8G

ERD-1.2G

ERD-1.8G



ER-1.2G2

ER-1.8G3

ER-1.2GS

ER-1.8GS

Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature
ER-1.2G	1210*700*1900	220V/50Hz	0.36kW	1000L	Static	0~10℃
ER-1.8G	1810*700*1900	220V/50Hz	0.49kW	1600L	Static	0~10℃
ERD-1.2G	1210*700*1900	220V/50Hz	0.36kW	1000L	Static	-6~-12℃/0~10℃
ERD-1.8G	1810*700*1900	220V/50Hz	0.56kW	1600L	Static	-6~-12℃/0~10℃

Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature
ER-1.2G2	1210*700*1900	220V/50Hz	0.22kW	1000L	Static	0~10℃
ER-1.8G3	1810*700*1900	220V/50Hz	0.49kW	1600L	Static	0~10℃
ER-1.2GS	1210*700*1900	220V/50Hz	0.36kW	1000L	Static	-6~-12℃/0~10℃
ER-1.8GS	1810*700*1900	220V/50Hz	0.49kW	1600L	Static	-6~-12℃/0~10℃

Salad Bar



SLG-1500/1800



SLG-1500A/1800A

Model	Size(mm)	Voltage	Frequency	Cooling Way	Refrigerant	Temperature
SLG-1200	1200*800*1430	220V	50Hz	Fan Cooling	R290	0~10℃
SLG-1500	1500*800*1430	220V	50Hz	Fan Cooling	R290	0~10℃
SLG-1800	1800*800*1430	220V	50Hz	Fan Cooling	R290	0~10℃
SLG-1200A	1200*800*1430	220V	50Hz	Fan Cooling	R290	0~10℃
SLG-1500A	1500*800*1430	220V	50Hz	Fan Cooling	R290	0~10℃
SLG-1800A	1800*800*1430	220V	50Hz	Fan Cooling	R290	0~10℃



SLG-H1580
SLG-H1910



SLG-H1570
SLG-H1900



SLG-H1500



SLG-H1830

Model	Size(mm)	Voltage	Power	Refrigerant	Temperature
SLG-H1580	1580*800*1380	220V/50Hz	0.52kW	R134a/R404	2~10℃
SLG-H1910	1910*800*1380	220V/50Hz	0.705kW	R134a/R404	2~10℃
SLG-H1570	1570*800*1380	220V/50Hz	0.52kW	R134a/R404	2~10℃
SLG-H1900	1900*800*1380	220V/50Hz	0.705kW	R134a/R404	2~10℃
SLG-H1500	1500*750*1220	220V/50Hz	0.48kW	R134a/R404	2~10℃
SLG-H1830	1830*750*1220	220V/50Hz	0.52kW	R134a/R404	2~10℃

Bakery Refrigerator & Freezer



KPG-28T



KPG-42T



Model	Size(mm)	Packing Size (mm)	Voltage	Power	Cooling Way	N.W.	G.W.	Temperature
KPG-14F	650*810*2050	750*950*2150	220V/50Hz	0.42kW	Fan Cooling	95kg	110kg	-18~-22 C
KPG-28F	1220*810*2050	1320*950*2050	220V/50Hz	0.70kW	Fan Cooling	120kg	135kg	-18~-22 C
KPG-42F	1830*810*2050	1930*950*2050	220V/50Hz	1.1kW	Fan Cooling	180kg	200kg	-18~-22 C

Intelligent Embryo Drying Cabinet



ASFG-610



ASFG-1260



ASFG-1860

Model	Size(mm)	Iner Size (mm)	Packing Size (mm)	Voltage	Power	Capacity	N.W./G.W.	Temperature
ASFG-610	610*650*2030	528*458*1590	690*690*2120	220V/50Hz	0.28kW	480L	75/80kg	0~10 C
ASFG-1260	1260*720*2100	1190*585*1590	1340*760*2190	220V/50Hz	0.58kW	1260L	120/140kg	0~10 C
ASFG-1860	1860*720*2100	1770*585*1590	1940*760*2190	220V/50Hz	0.70kW	1860L	180/215kg	0~10 C

Horizontal Refrigerator



Model	Size(mm)	Iner Size (mm)	Packing Size (mm)	Voltage	Power	Capacity	N.W./G.W.	Temperature
ASBX100	700*665*940	550*465*480	750*660*950	220V/50Hz	0.18kW	133L	30/33kg	0~10/-18 C
ASBX258	1080*665*940	945*465*480	1140*660*950	220V/50Hz	0.25kW	258L	40/45kg	0~10/-18 C
ASBX338	1300*665*940	1165*465*480	1360*660*950	220V/50Hz	0.28kW	338L	47/54kg	0~10/-18 C
ASBX538	1500*750*940	1360*540*715	1560*775*1000	220V/50Hz	0.35kW	538L	74/85kg	0~10/-18 C
ASBX638	1800*750*940	1660*540*715	1860*775*1020	220V/50Hz	0.40kW	638L	82/90kg	0~10/-18 C
ASBX738	2100*750*940	1960*540*715	2160*775*1020	220V/50Hz	0.46kW	738L	97/108kg	0~10/-18 C
ASBX1238	2640*900*950	2500*695*715	2660*925*1020	220V/50Hz	0.78kW	1238L	137/150kg	0~10/-18 C

Model	Size(mm)	Iner Size (mm)	Packing Size (mm)	Voltage	Power	Capacity	N.W./G.W.	Temperature
BLBX258	1090*625*930	945*465*480	1140*660*950	220V/50Hz	0.25kW	258L	40/45kg	0~10/-18 C
BLBX338	1310*625*930	1165*465*480	1360*660*950	220V/50Hz	0.28kW	338L	47/54kg	0~10/-18 C
BLBX538	1510*710*930	1360*540*715	1560*775*950	220V/50Hz	0.40kW	538L	74/85kg	0~10/-18 C
BLBX638	1810*710*930	1660*540*715	1860*775*1020	220V/50Hz	0.45kW	638L	82/90kg	0~10/-18 C
BLBX738	2110*710*930	1960*540*715	2160*775*1020	220V/50Hz	0.51kW	738L	97/108kg	0~10/-18 C
BLSG258	1090*625*930	945*465*480	1140*660*950	220V/50Hz	0.21kW	258L	40/45kg	0~10 C
BLSG338	1310*625*930	1165*465*480	1360*660*950	220V/50Hz	0.22kW	338L	47/54kg	0~10 C
BLSW318	1310*625*930	1165*465*480	1360*660*950	220V/50Hz	0.27kW	318L	47/54kg	0~10/-18 C
SWSD318	1300*665*940	1165*465*480	1360*660*950	220V/50Hz	0.27kW	318L	47/54kg	0~10/-18 C



Beverage Showcase



BS-188B/218B/
280B/380B



BS-380B2



BS-680B/BS-760B



BS-1300B

Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature
BS-188B	510*500*1720	220V/50Hz	0.145kW	180L	Static	0~10℃
BS-218B	550*500*1820	220V/50Hz	0.165kW	210L	Static	0~10℃
BS-280B	550*590*1910	220V/50Hz	0.165kW	280L	Static	0~10℃
BS-380B	600*640*2010	220V/50Hz	0.186kW	380L	Static	0~10℃
BS-380B2	600*640*2010	220V/50Hz	0.186kW	380L	Static	0~10℃
BS-680B	1000*580*1905	220V/50Hz	0.22kW	680L	Static	0~10℃
BS-760B	1200*580*1905	220V/50Hz	0.25kW	760L	Static	0~10℃
BS-1300B	1690*600*1920	220V/50Hz	0.395kW	1300L	Static	0~10℃

Beverage Showcase



Model:	AG-1.2FA	AG-1.6FA
Size(mm):	1200*700*2100	1800*700*2100
Packing Size(mm):	1300*800*2200	1900*800*2200
Voltage:	220V/50Hz	220V/50Hz
Power:	0.6kW	0.8kW
Capacity	920L	1400L
Cooling Way:	Fan Cooling	Fan Cooling
N.W./G.W.:	150/160kg	195/205kg
Temperature Range:	0~5℃ / -10~-18℃	0~5℃ / -10~-18℃

Beverage Showcase



AG-0.6FR

AG-1.2FR

AG-1.8FR

AG-2.6FR

Model	Size(mm)	Packing Size (mm)	Voltage	Power	Capacity	Cooling Way	N.W/G.W.	Temperature
AG-0.6FR	630*680*2130	730*790*2200	220V/50Hz	0.20kW	420L	Fan Cooling	95/105kg	2~8℃
AG-1.2FR	1260*680*2130	1360*790*2200	220V/50Hz	0.60kW	920L	Fan Cooling	150/160kg	2~8℃
AG-1.8FR	1860*680*2130	1960*790*2200	220V/50Hz	0.80kW	1400L	Fan Cooling	195/205kg	2~8℃
AG-2.6FR	2600*800*2130	2700*920*2200	220V/50Hz	1.0kW	2440L	Fan Cooling	250/260kg	2~8℃

Glass Door Display Fridge



AG-900LR/AG-900LF



AG-1390LR/AG-1390LF

Model	Size(mm)	Packing Size (mm)	Voltage	Power	Capacity	Cooling Way	N.W/G.W.	Temperature
AG-900LR	1260*760*1980	1360*900*2050	220V/50Hz	0.60kW	900L	Fan Cooling	150/160kg	2~8℃
AG-900LF	1260*760*1980	1360*900*2050	220V/50Hz	1.3kW	900L	Fan Cooling	160/170kg	-18~-22℃
AG-1390LR	1880*760*1980	1980*900*2050	220V/50Hz	0.80kW	1390L	Fan Cooling	195/205kg	2~8℃
AG-1390LF	1880*760*1980	1980*900*2050	220V/50Hz	1.8kW	1390L	Fan Cooling	200/220kg	-18~-22℃

Supermarket Showcase

Product Description

- ★ Optimized blowing fall;
- ★ High performance evaporator;
- ★ Choose environmental refrigerant R22;
- ★ Energy saving blower motor;
- ★ The latest new LED;
- ★ Exceeding moist working side plate condensed water guiding designing;



Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature
AF1-10	1000*800*1980	220V/50Hz	0.95kW	470L	Fan Cooling	2~10℃
AF1-12	1200*800*1980	220V/50Hz	1.25kW	520L	Fan Cooling	2~10℃
AF1-15	1500*950*1980	220V/50Hz	1.30kW	846L	Fan Cooling	2~10℃
AF1-20	2000*950*1980	220V/50Hz	1.80kW	1146L	Fan Cooling	2~10℃
AF1-25	2500*950*1980	220V/50Hz	2.50kW	1446L	Fan Cooling	2~10℃
AF1-30	3000*950*1980	220V/50Hz	2.60kW	1746L	Fan Cooling	2~10℃

Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature
AF2-10	1100*800*1980	220V/50Hz	0.95kW	470L	Fan Cooling	2~10℃
AF2-12	1300*800*1980	220V/50Hz	1.25kW	520L	Fan Cooling	2~10℃
AF2-15	1600*950*1980	220V/50Hz	1.30kW	846L	Fan Cooling	2~10℃
AF2-20	2100*950*1980	220V/50Hz	1.80kW	1146L	Fan Cooling	2~10℃
AF2-25	2600*950*1980	220V/50Hz	2.50kW	1446L	Fan Cooling	2~10℃
AF2-30	3100*950*1980	220V/50Hz	2.60kW	1746L	Fan Cooling	2~10℃



Beer Showcase

Wine Showcase



PJG-500S



PJG-900S



PJG-1350S



PJG-500



PJG-900



PJG-1350

Model	Size(mm)	Packing Size (mm)	Voltage	Power	Cooling Way	N.W.	G.W.	Temperature
PJG-500S	500*535*830	560*585*880	220V/50Hz	0.16kW	Fan Cooling	39kg	43kg	2~10 C
PJG-900S	900*535*830	965*585*880	220V/50Hz	0.19kW	Fan Cooling	65kg	69kg	2~10 C
PJG-1350S	1350*535*830	1450*585*880	220V/50Hz	0.22kW	Fan Cooling	89kg	93kg	2~10 C
PJG-500	500*535*830	560*585*880	220V/50Hz	0.16kW	Fan Cooling	39kg	43kg	2~10 C
PJG-900	900*535*830	965*585*880	220V/50Hz	0.19kW	Fan Cooling	55kg	59kg	2~10 C
PJG-1350	1350*535*830	1450*585*880	220V/50Hz	0.22kW	Fan Cooling	76kg	81kg	2~10 C




Product Description

- ◆ Insulated Glass Door, easy to open ,automatic return; adjustable laminate,more convenient for employees to tally, merchandise display cabinet.
- ◆ Microcomputer precise temperature control,air-cooled forced circulation,product energy saving,uniform temperature.



Model	Size(mm)	Voltage	Power	Description	Cooling Way	Temperature
RJS-600	600*600*2200	220V/50Hz	0.416kW	Single Door	Fan Cooling	5~22 C
RJS-1200	1200*600*2200	220V/50Hz	0.616kW	Double Door	Fan Cooling	5~22 C
RJS-1800	1800*600*2200	220V/50Hz	0.816kW	Three Doors	Fan Cooling	5~22 C

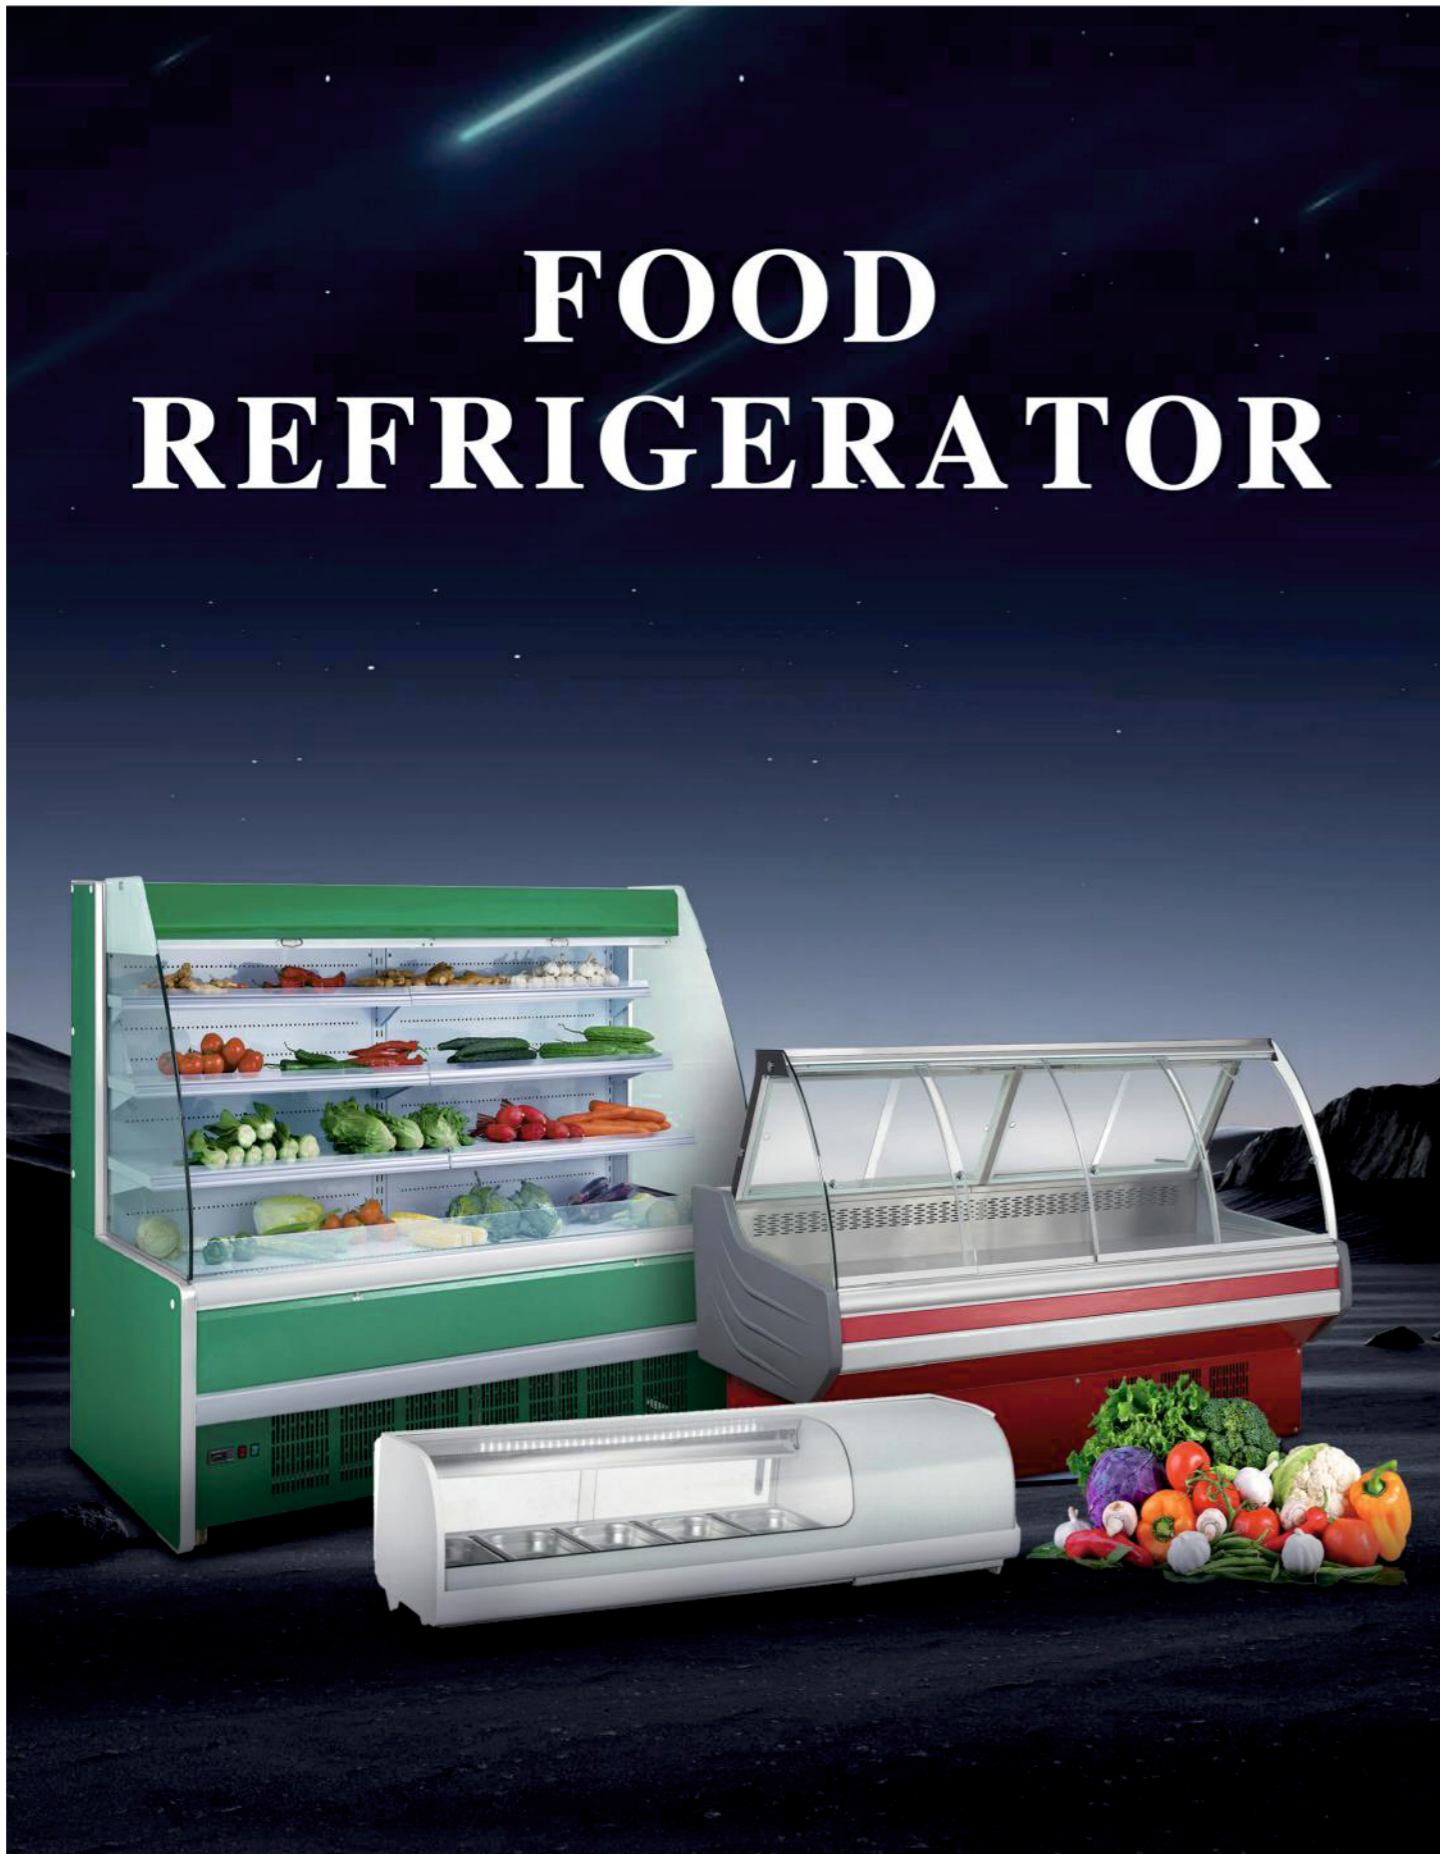

Beef Steak Dry Ager Fridge



BS-620L1F



BS-1350L2F



BS-2090L3F

Model	Size(mm)	Packing Size (mm)	Voltage	Power	Cooling Way	N.W.	G.W.	Temperature
BS-620L1F	650*760*2280	750*880*2380	220V/50Hz	0.58kW	Fan Cooling	100kg	120kg	-5~10 C
BS-1350L2F	1300*760*2280	1400*880*2380	220V/50Hz	0.78kW	Fan Cooling	200kg	240kg	-5~10 C
BS-2090L3F	1960*760*2280	2060*880*2380	220V/50Hz	1.08kW	Fan Cooling	300kg	360kg	-5~10 C

Sushi Showcase



ACS-42L



ACS-52L



ACS-62L



ACS-132L

Model	Size(mm)	Packing Size (mm)	Voltage	Power	Capacity	Certification	N.W./G.W.	Temperature
ACS-42L	1148*406*316	1257*495*375	220V/50Hz	0.23kW	42L	CB,CE,GS,ETL	35/37kg	2~10 C/35.6~50 F
ACS-52L	1324*406*316	1433*495*375	220V/50Hz	0.23kW	52L	CB,CE,GS,ETL	39/41kg	2~10 C/35.6~50 F
ACS-62L	1500*406*316	1609*495*375	220V/50Hz	0.23kW	62L	CB,CE,GS,ETL	42/45kg	2~10 C/35.6~50 F
ACS-132L	1711*406*316	1880*495*375	220V/50Hz	0.23kW	132L	CB,CE,GS,ETL	46/50kg	2~10 C/35.6~50 F

Meat Display Refrigerator



Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature
ARG-15	1500*1180*900	220V/50Hz	0.79kW	155L	Fan Cooling	2~8℃
ARG-20	2000*1180*900	220V/50Hz	0.80kW	210L	Fan Cooling	2~8℃
ARG-25	2500*1180*900	220V/50Hz	1.10kW	265L	Fan Cooling	2~8℃
ARG-30	3000*1180*900	220V/50Hz	1.20kW	320L	Fan Cooling	2~8℃

Fruit Display Refrigerator



Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature
SG3-15	1500*980*1650	220V/50Hz	1.40kW	525L	Fan Cooling	2~10℃
SG3-20	2000*980*1650	220V/50Hz	1.80kW	712L	Fan Cooling	2~10℃
SG3-25	2500*980*1650	220V/50Hz	2.635kW	899L	Fan Cooling	2~10℃
SG3-30	3000*980*1650	220V/50Hz	2.70kW	1085L	Fan Cooling	2~10℃
SG4-15	1500*980*1650	220V/50Hz	1.40kW	525L	Fan Cooling	2~10℃
SG4-20	2000*980*1650	220V/50Hz	1.80kW	712L	Fan Cooling	2~10℃
SG4-25	2500*980*1650	220V/50Hz	2.635kW	899L	Fan Cooling	2~10℃
SG4-30	3000*980*1650	220V/50Hz	2.70kW	1085L	Fan Cooling	2~10℃

Deli Refrigerator




DGB-15



DGC-15



DGY2-15

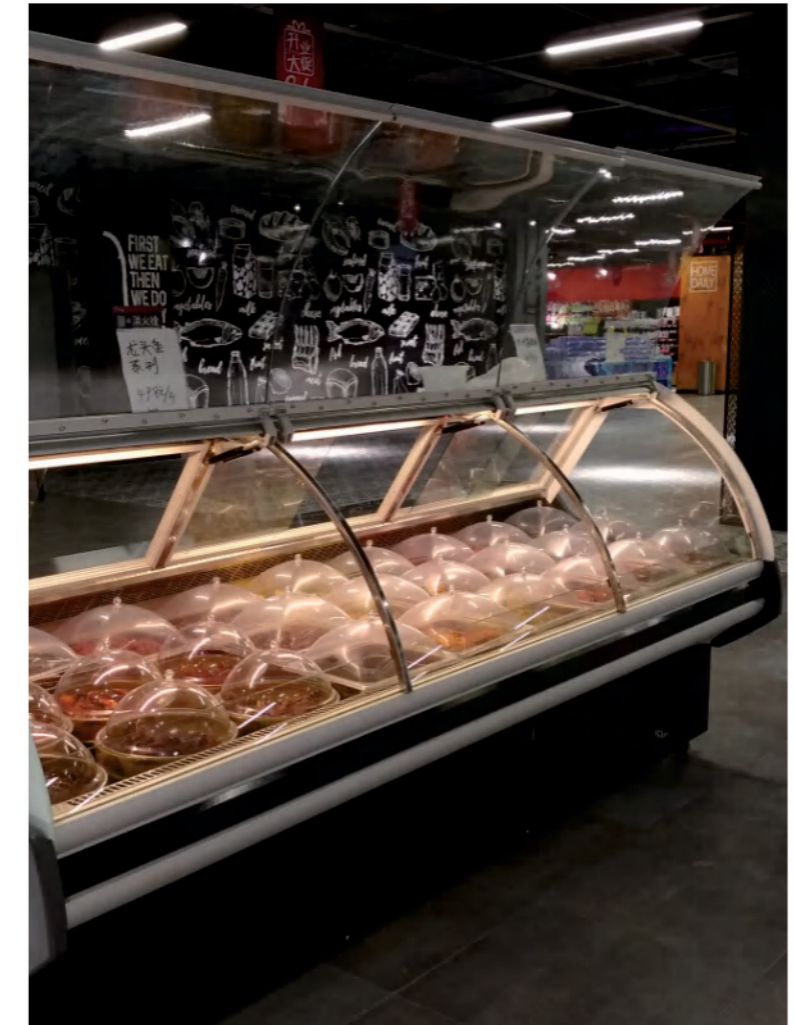

Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature	Type
DGB-15	1500*1180*1280	220V/50Hz	0.79kW	155L	Fan Cooling	2~8℃	Back Open Door
DGB-20	2000*1180*1280	220V/50Hz	0.80kW	210L	Fan Cooling	2~8℃	Back Open Door
DGB-25	2500*1180*1280	220V/50Hz	1.10kW	265L	Fan Cooling	2~8℃	Back Open Door
DGB-30	3000*1180*1280	220V/50Hz	1.20kW	320L	Fan Cooling	2~8℃	Back Open Door
DGC-15	1500*1180*1280	220V/50Hz	0.79kW	155L	Fan Cooling	2~8℃	Front Flip Door
DGC-20	2000*1180*1280	220V/50Hz	0.80kW	210L	Fan Cooling	2~8℃	Front Flip Door
DGC-25	2500*1180*1280	220V/50Hz	1.10kW	265L	Fan Cooling	2~8℃	Front Flip Door
DGC-30	3000*1180*1280	220V/50Hz	1.20kW	320L	Fan Cooling	2~8℃	Front Flip Door
DGY-15	1500*1180*1280	220V/50Hz	0.79kW	155L	Fan Cooling	2~8℃	Sliding Door
DGY-20	2000*1180*1280	220V/50Hz	0.80kW	210L	Fan Cooling	2~8℃	Sliding Door
DGY-25	2500*1180*1280	220V/50Hz	1.10kW	265L	Fan Cooling	2~8℃	Sliding Door
DGY-30	3000*1180*1280	220V/50Hz	1.20kW	320L	Fan Cooling	2~8℃	Sliding Door
DGY2-15	1560*1130*1280	220V/50Hz	0.79kW	140L	Fan Cooling	2~8℃	Sliding Door
DGY2-20	2060*1180*1280	220V/50Hz	0.80kW	190L	Fan Cooling	2~8℃	Sliding Door
DGY2-25	2560*1180*1280	220V/50Hz	1.10kW	240L	Fan Cooling	2~8℃	Sliding Door
DGY2-30	3060*1180*1280	220V/50Hz	1.20kW	290L	Fan Cooling	2~8℃	Sliding Door

Salad Bar Refrigerator



Model	Size(mm)	Voltage	Power	Capacity	Cooling Way	Temperature
PZF-1200R	1200*395*225	220V/50Hz	0.189kW	4*GN1/3	Static	0~10 C
PZT-1200R	1500*395*225	220V/50Hz	0.196kW	5*GN1/3+1*GN1/2	Static	0~10 C
PZT-1500R	1800*395*225	220V/50Hz	0.204kW	8*GN1/3	Static	0~10 C
PZT-1800R	2000*395*225	220V/50Hz	0.210kW	9*GN1/3	Static	0~10 C

Ice-Cream Machine



AIC-Z965T

AIC-X968

AIC-C965

AIC-G30S

Model	Size(mm)	Voltage	Power	Production	Max Cup
AIC-Z965T	555*760*780	220V/50Hz	1.8kW	28L/H	12-14Cups/Time
AIC-X965	555*760*1350	220V/50Hz	1.8kW	28L/H	12-14Cups/Time
AIC-X968	555*760*1350	220V/50Hz	3.3kW	58L/H	Continuously
AIC-G30S	555*760*1420	220V/50Hz	2.4kW	38~40L/H	Hopper:12.5L



Ice Maker 30kg

Model: AS-IM30
Voltage: 220V/50Hz
Power: 0.74kW
Size: 500*390*800mm
Packing Size: 570*460*890mm
Production: 38KG/Day
Ice Tray: 4*8pcs



Ice Maker 40kg

Model: AS-IM40
Voltage: 220V/50Hz
Power: 0.76kW
Size: 500*390*800mm
Packing Size: 570*460*890mm
Production: 40KG/Day
Ice Tray: 5*8pcs



Ice Maker 60kg

Model: AS-IM60
Voltage: 220V/50Hz
Power: 0.8kW
Size: 500*505*800mm
Packing Size: 560*580*850mm
Production: 60KG/Day
Ice Tray: 5*12pcs



Ice Maker 72kg

Model: AS-IM72
Voltage: 220V/50Hz
Power: 0.83kW
Size: 660*610*920mm
Packing Size: 740*680*1010mm
Production: 72KG/Day
Ice Tray: 6*12pcs



Ice Maker 90kg

Model: AS-IM90
Voltage: 220V/50Hz
Power: 0.89kW
Size: 660*610*920mm
Packing Size: 740*680*1010mm
Production: 90KG/Day
Ice Tray: 5*18pcs



Ice Maker 120kg

Model: AS-IM120
Voltage: 220V/50Hz
Power: 0.98kW
Size: 660*610*920mm
Packing Size: 740*680*1010mm
Production: 120KG/Day
Ice Tray: 6*18pcs



Ice Maker 150kg

Model: AS-IM150
Voltage: 220V/50Hz
Power: 1.28kW
Size: 565*820*1560mm
Packing Size: 640*665*660+640*890*1060
Production: 150KG/Day
Ice Tray: 12*13pcs



Ice Maker 250kg

Model: AS-IM250
Voltage: 220V/50Hz
Power: 2.0kW
Size: 765*820*1770mm
Packing Size(): 840*705*660+840*890*1060
Production: 250KG/Day
Ice Tray: 13*18pcs



Ice Maker 500kg

Model: AS-IM500
Voltage: 220V/50Hz
Power: 3.98kW
Size: 765*820*1770mm
Packing Size: 840*705*825+840*890*1100
Production: 500KG/Day
Ice Tray: 20*22pcs